

Häny Mixing and Injection Technology

# Grout Pump ZMP 610



Extremely compact and low-wear plunger pump for pumping suspensions with a low W/C ratio and mortar with sand content. Suitable for all injection work and for pumping backfilling mortar for segment lining of tunnels.

# Grout Pump

## ZMP 610


### Key features

- ▶ Extremely compact vertical injection pump for space-saving installation
- ▶ Infinitely variable limitation of injection pressure and delivery rate
- ▶ High reliability and low-maintenance operation with good accessibility to the wear parts
- ▶ Fast suction stroke to prevent clogging by flushing the valves
- ▶ Cooling water connection for continuous operation and high ambient temperatures

### Typical applications

- ▶ Injection of anchors, soil nails, and tension cables, as well as for sleeve pipes, rock, and contact injections
- ▶ Pre- and post-injections, pumping of bentonite suspensions for pipe and microtunnel driving and filling of pea gravel

### Pump performance

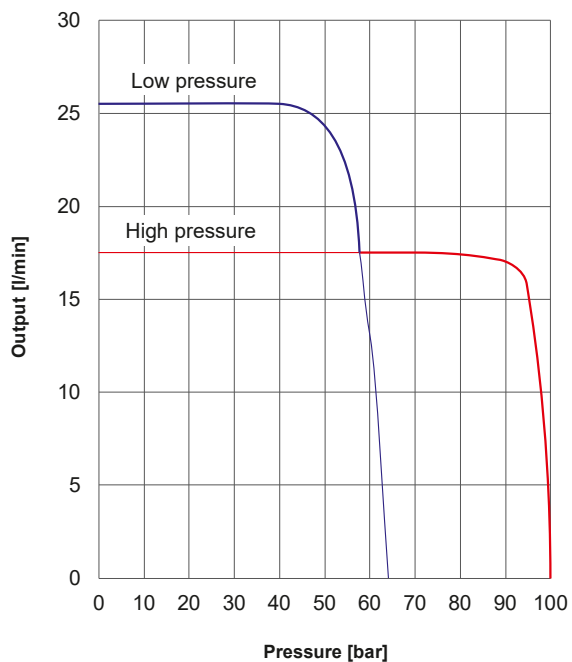

### Grout pump

Plunger Ø:	65 mm
Capacity <sup>1</sup> :	1.5 m <sup>3</sup> /h
Pressure max.:	100 bar
Pressure min.:	3 bar
Volume per stroke <sup>2</sup> :	0.82 l
Max. aggregate size:	5 mm
Hydraulic tank:	52 l
Pump module:	single
Cooling water flow rate:	2–3 l/min
Cooling water connection:	BSP 3/8"
Pressure connection:	BSP 1"
Suction connection:	BSP 1"

### Included as standard

- Manual pressure and flow control
- Oil level, temperature, and filter contamination indicator

<sup>1</sup> Water to cement ratio = 1

<sup>2</sup> Filling ratio = 100%

### Control

PLC
Lockable main switch, emergency stop
Pump ON-OFF

### Optional

- Remote control
- Data logging for pressure and flow rate





### Electrical data

Voltage:	3x 400/460
Frequency:	50 / 60 Hz
Nominal power:	5.5 / 6.3 kW

### Weight and dimensions

Approx. weight:	270 kg
Width:	510 mm
Height:	1,410 mm
Length:	758 mm

### Construction and dimensions

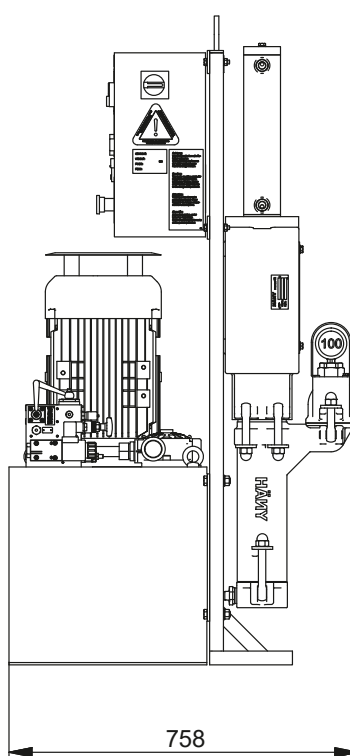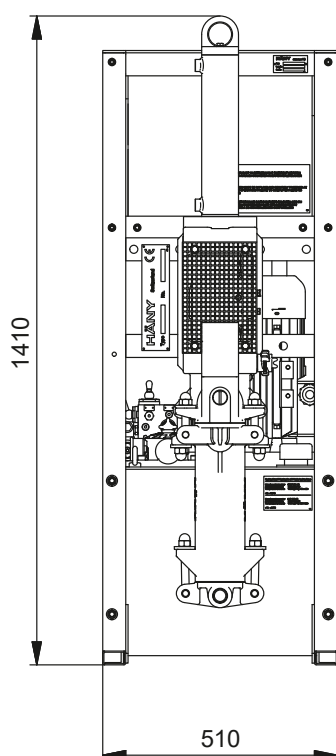

Document No. PM2-102040.00/10.18. Legal Notice © Copyright 2018, Häny AG, Jona/Switzerland. Any unauthorized use or copying of the contents or any part hereof is prohibited. Illustrations and photos may show equipment with optional extras. No warranty is made regarding specifications or otherwise. Specifications and equipment are subject to change without notice.



**HÄNY**  
Mixing and Injection Technology

Häny AG – Mixing and Injection Technology  
Buechstr. 20 | 8645 Jona/Switzerland | Phone +41 44 925 41 11 | [www.haeny.com](http://www.haeny.com)