


Häny Mixing and Injection Technology

Agitator HRW 150

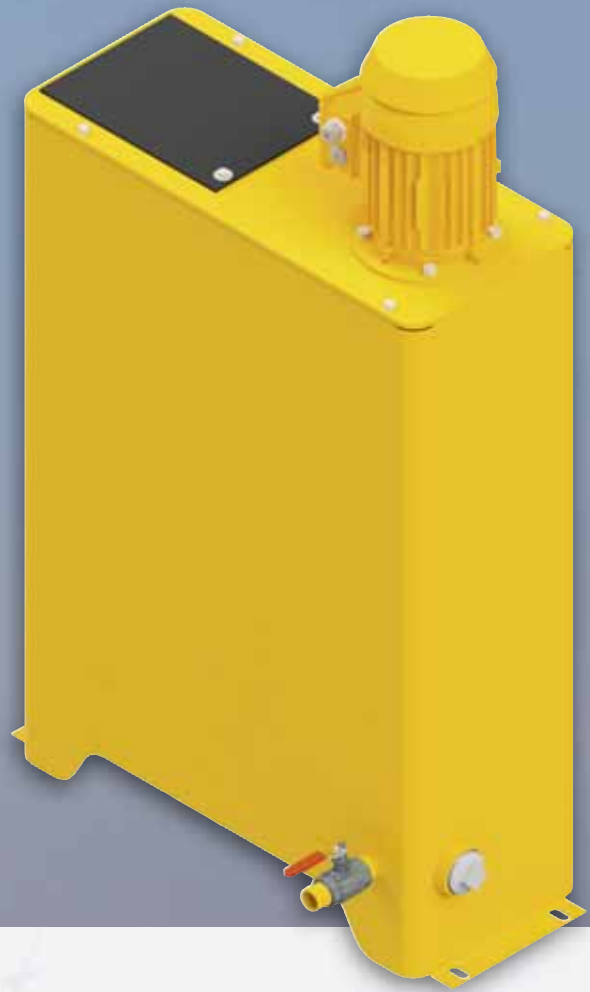

Agitators ensure continuous operation by holding and homogenizing the mixed suspension and removing any air bubbles by means of a slowly rotating paddle.

HÄNY
Mixing and Injection Technology

Agitator

HRW 150

Key features

- ▶ Slowly rotating paddle for homogenization of the mixed material and removal of existing air bubbles
- ▶ Cleaning opening with protective grid and splash guard
- ▶ Inclined bottom for complete emptying with drain plug

Typical applications

- ▶ Holding tank between mixer and injection pump

3D model



Agitator

| | |
|---------------------|-----------------------|
| Usable content: | 150 l |
| Liquid temperature: | Max. 40°C |
| Inlet connection: | hose connection 60 mm |
| Outlet connection: | 1" / 1½" |
| Drain plug: | 2" |




Electrical data

| | |
|------------------|-----------------------------|
| Voltage: | 3x 400/460 |
| Frequency: | 50 / 60 Hz |
| Nominal power: | 0.55 / 0.62 kW |
| Nominal current: | 1.62 / 1.59 A |
| Speed: | 690 / 830 min ⁻¹ |

Weight and dimensions

| | |
|-----------------|----------|
| Approx. weight: | 82.5 kg |
| Width: | 562 mm |
| Height: | 1,321 mm |
| Length: | 797 mm |

Design and dimensions

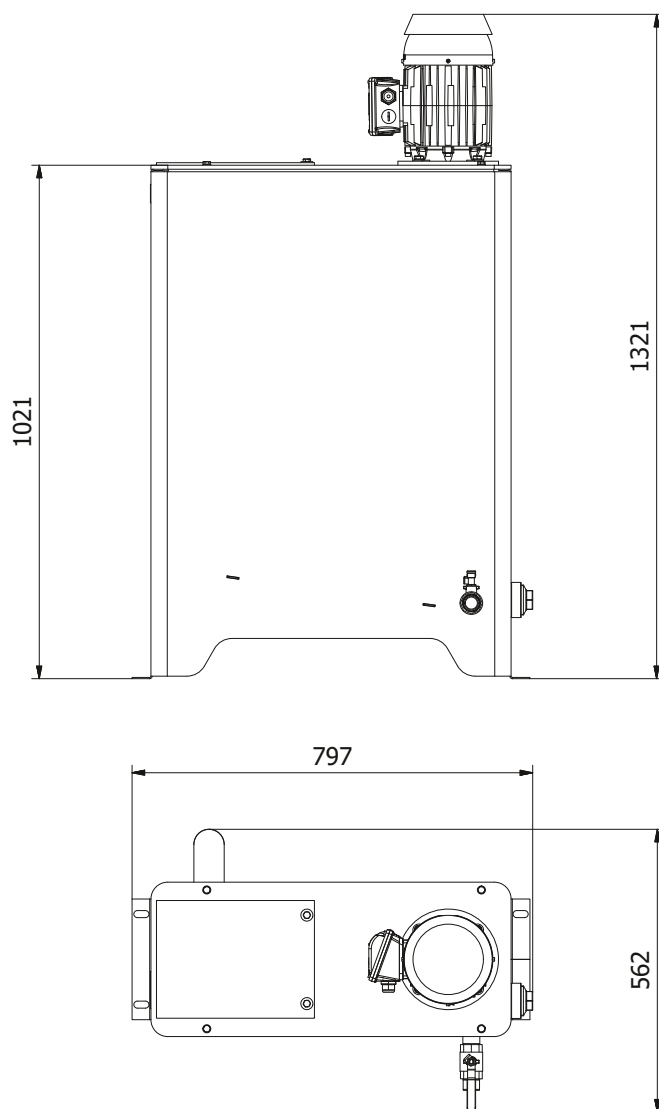

Document No.: PM2-102054-00/10; 18. Legal Notice © Copyright 2018, Häny AG, Jona/Switzerland. Any unauthorized use or copying of the contents or any part hereof is prohibited. Illustrations and photos may show equipment with optional extras. No warranty is made regarding specifications or otherwise. Specifications and equipment are subject to change without notice.



HÄNY
Mixing and Injection Technology

Häny AG – Mixing and Injection Technology

Buechstr. 20 | 8645 Jona/Switzerland | Phone +41 44 925 41 11 | www.haeny.com